




Telstra Track and Monitor

Cat-M1 Rechargeable Tracking Tag

Quick Start Guide

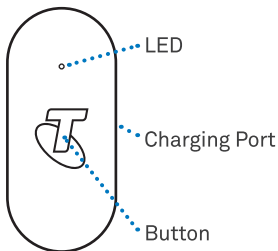

Package Contents

- 1 x Cat-M1 Rechargeable Tracking Tag
- 1 x Keyring Attachment
- 1 x USB Type-C Power Cable
- 1 x Quick Start Guide
- 1 x Warranty Leaflet

Turning on your tracking tag

Your tracking tag will be in shipping mode when first removed from its packaging. Please follow the below steps to activate:

1. Press and hold the button on the top of the tracking tag for 2 seconds then release.
2. LED will light up and play a tone.
3. Navigate to <http://trackandmonitor.telstra.com> or alternatively search for Telstra Track and Monitor app on the Google Play Store or Apple App Store.
4. Log in with your Telstra ID to finalise setup and configuration.

Note: Check the app or portal to confirm the device has completed setup. Once activated the unit will be visible, this can take up to 10 minutes.

Troubleshooting and FAQs

If you experience any issues during the install and setup of your tracking tag please refer to telstra.com/assettracking for assistance.

Charging your tracking tag

To charge your tracking tag, connect the cable into the tag and plug the other end into a USB power source.

The light on the top of the tracking tag will start to flash white to indicate that charging has commenced. Depending on the

power source it should take around 2 hours to fully charge.


When charging has completed the light will remain solid white.

Safety

A reminder that you are responsible for arranging installation of the tracking tag(s) on your assets and the installation should be completed in a way which complies with all relevant health and safety regulations and requirements.

Tracking tag information

The tracking tag lists key identifiers (including the IMEI) on the back. After initial activation, the IMEI is the identifier which you will use with the Track and Monitor web portal or Mobile app, or when you call Telstra for assistance.

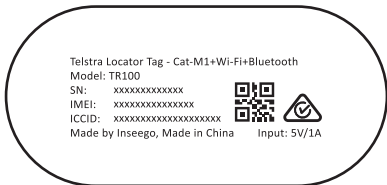

Installation and Mounting

Optimal performance of this tracking tag is obtained by installing or mounting on the side of an asset with the tracking tag positioned horizontally showing the logo facing outwards. Other considerations should apply to visibility of the sky in order to obtain good GPS position fixes.

Battery Life and Durability

Extended exposure to conditions outside of the recommended temperature range (5°C to 50°C) may shorten the life of the tracking tag and battery life. Ensure you use the tag within the normal operating temperature range (5°C to 50°C).