




Telstra Track and Monitor

Cat-M1 Tracking Unit

Quick Start Guide

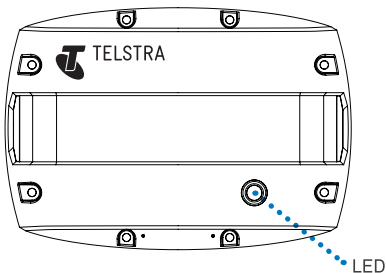

Package Contents

- 1 x Cat-M1 Tracking Unit
- 1 x Industrial Lithium Primary Battery Pack
- 1 x Quick Start Guide
- 1 x Warranty Leaflet

Normal and recommended operating temperature range +5°C to +50°C

Turning on your tracking unit

Your tracking unit will be in shipping mode when first removed from its packaging. Please follow the below steps to activate:

1. Obtain magnet from accessory pack.
2. Swipe magnet over the LED on the top of the unit. LED will start to slowly pulse.
3. Swipe magnet over the LED a second time to confirm activation and power on.

Note: Second swipe must be done within 5 seconds of first swipe. LED will stay on solid for 5 seconds to confirm this device has successfully powered up.

4. Navigate to <http://trackandmonitor.telstra.com> or alternatively search for Telstra Track and Monitor app on the Google Play Store or Apple App Store.
5. Log in with your Telstra ID to finalise setup and configuration.

Note: Check the app or portal to confirm the device has completed setup. Once activated the unit will be visible, this can take up to 10 minutes.

Troubleshooting and FAQs

If you experience any issues during the install and setup of your tracking unit please refer to telstra.com/assettracking for assistance.

Tracking unit identification

The tracking tag lists key identifiers (including the serial number) on the side. After initial activation, the serial number is the identifier which you will use with the Track and Monitor web portal or Mobile app, or when you call Telstra for assistance.



Safety

A reminder that you are responsible for arranging installation of the tracking unit on your asset and the installation should be completed in a way which complies with all relevant health and safety regulations and requirements. This tracking unit is not suitable for use in explosive or flammable environments.

Installation and Mounting

Optimal performance of this tracking unit is obtained by installing or mounting on the side of an asset with the tracking unit positioned horizontally showing the logo facing outwards. Other considerations should apply to visibility of the sky in order to obtain good GPS position fixes.

For best results attaching the tracking unit to an asset, please ensure correct preparation of the mounting surface utilising the scouring pad and cleaning wipes supplied in the accessory pack.

This tracking unit should never be mounted on the top of an asset where it may be submerged in water for extended periods of time.

Battery Life and Durability

Extended exposure to conditions outside of the recommended temperature range (5°C to 50°C) may shorten the life of the tracking unit and battery life. Ensure you use the unit within the normal operating temperature range (5°C to 50°C).