



Liberate Office (SIPC)

User Guide for
Liberate Android
Mobile App

Liberate Feature Guide Android Phone

Liberate allows customers to use their fixed line business number and unified communications (UC) features on their mobile phone. Customers get better call quality and performance as calls are carried on the voice calling network. So when you are on the go you can share Presence, access Enterprise Contacts, Chat with contacts and be able to seamlessly move a call back to the desktop phone when you get back into the office. You even have the ability to set which device will be alerted for incoming calls.




Downloading the Application

It is recommended that you download the Liberate application to ensure you have access to full functionality. You will receive a text message with a link to where to go to download the Liberate application. The Liberate application will download from the Play Store. To download:


1. Click on the link in the text message

Welcome to Liberate!
Harness the power of
a desk phone on your
mobile. Download the app
here telstra.com/liberateapp
Your Username is:
0355551234@telstra.com
. To access your converged
MessageBank, dial [101](tel:101).


2. The link will take you to the Google Play Store
3. Select **Install**

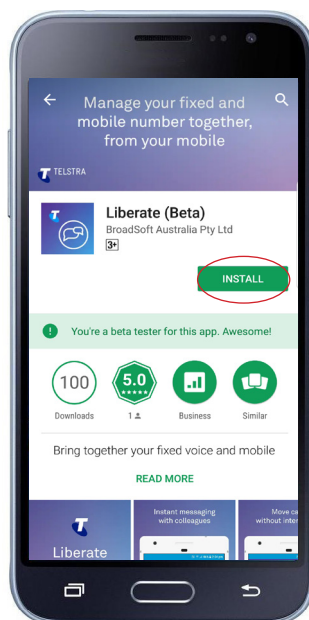

4. Tap **Open**
5. Read and Accept the **Licence Agreement** by clicking **Accept**

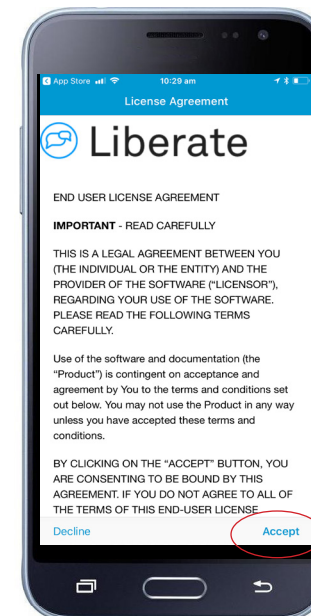


6. Click **Accept** again

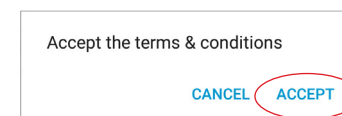


Welcome Screens

The Welcome Screens appear when you download the Liberate application. They provide an overview of some of the important Liberate features.

1. Swipe **Left** to view the Welcome Screens or Select **Skip** or **Close** to skip.

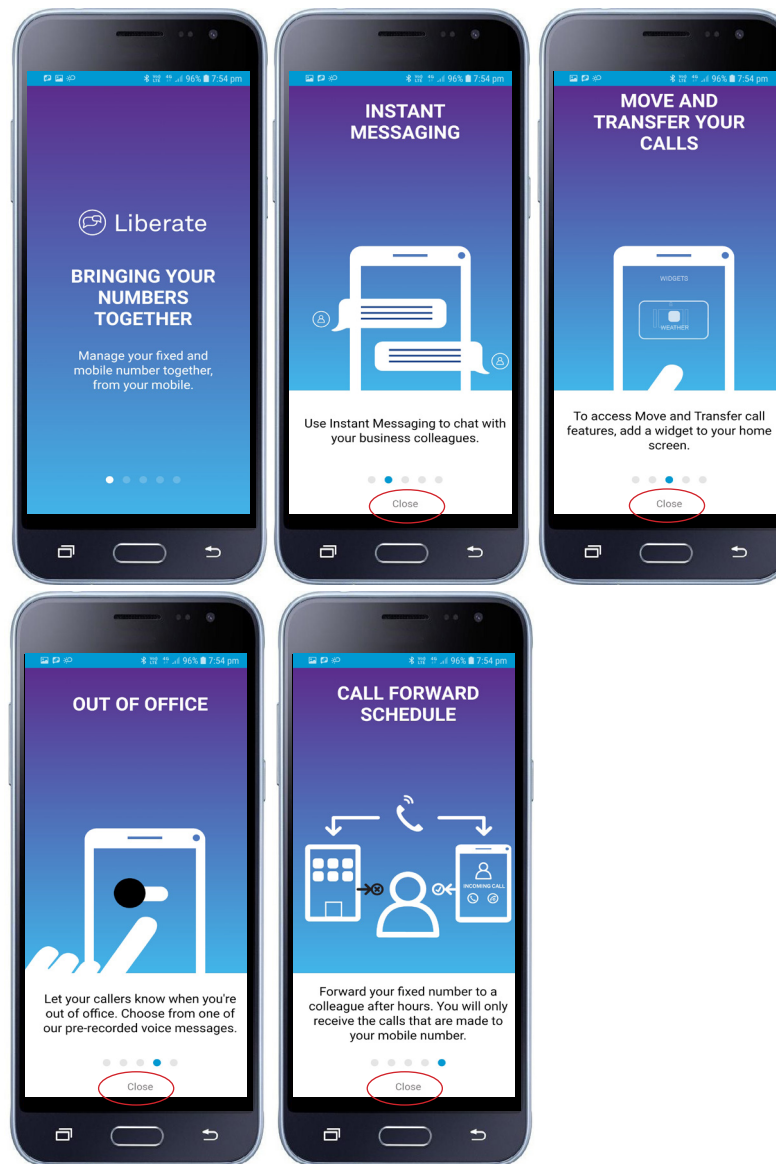


You will then see a series of screens that you have to **Allow** or **Deny**. These permissions are required to use the full functionality of Liberate. The following are some examples:

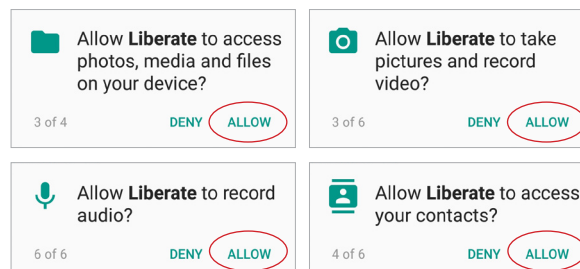

Signing In

To sign into Liberate:


1. Enter your **SIPC username** and **password** to sign In
2. Enter your **Mobile Number**
3. Select **Sign In**

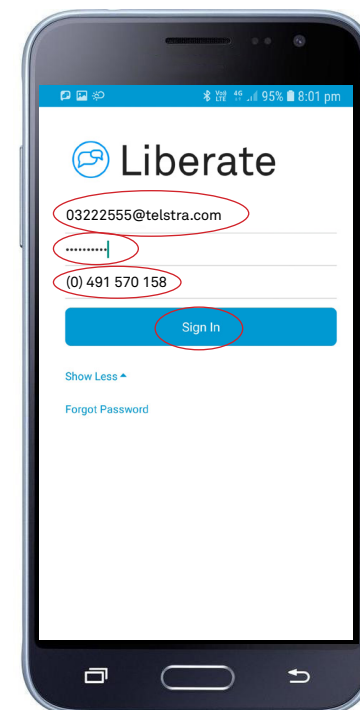


Forgot Password

Whilst signing in if you have forgotten your password.



1. Click on **Forgot Password** on the Sign in screen. This will take you to the **Password Reset Portal** to change your password.

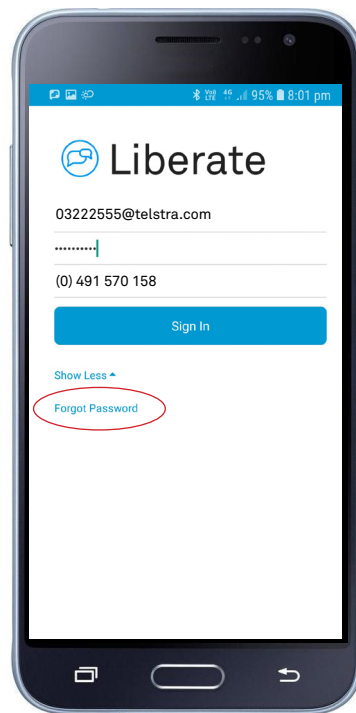

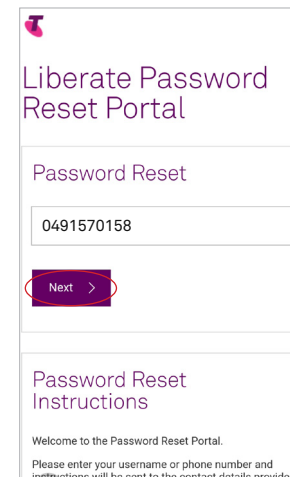


2. Enter your **username** or **telephone number** and tap **Next**
3. You should automatically receive a text message within a few minutes with the new PIN Number if not, Tap **Send New PIN**

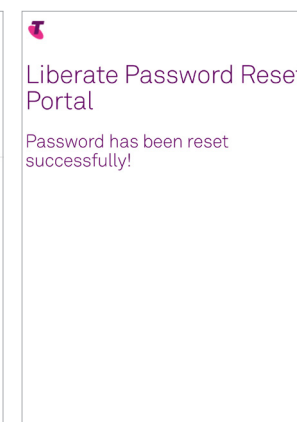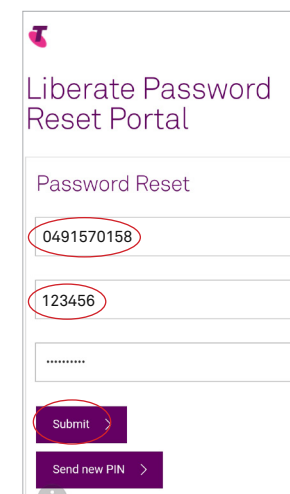

4. Enter that **PIN** number in the **PIN** field
5. Enter your **new Liberate Password**
6. Tap **Submit**




Adding your Profile Picture


1. Select 
2. Tap the icon above your name 
3. Tap the icon again
4. Select **Choose Existing Photo**
5. Select the images/album (or photo)
6. Select your photo 
7. Tap **Done**




Creating a Widget

Widgets show functionality specific to an application. The Liberate Widget allows you to **Transfer a Call, Move a Call** or manage **Identity**. On an Android phone you can view your Widget(s) on the Home screen. To access and add a Widget:

1. **Long press** a blank, available space on your home screen — not on an icon or the app launcher. Just hold your finger down on the screen.
2. Tap **Widgets** 
3. Scroll left to view **Liberate**
4. Tap **Liberate**
5. Tap and hold **Liberate**

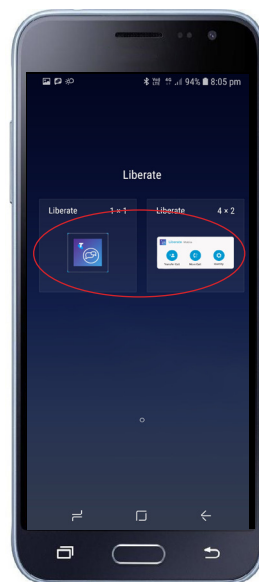

6. The widget will now appear on your Home screen

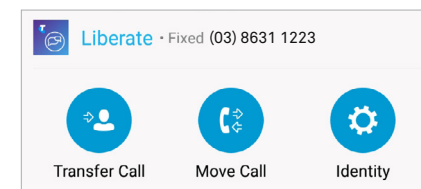


To Reorder the Widget:

1. On the **Home** screen long press the widget you wish to reorder
2. **Click and drag** the widget into the position on the **Home** screen where you want it to appear

To Remove a Widget:

1. On the **Home** screen long press the widget you wish to remove
2. **Click and drag** the widget to **Remove** at the top of the **Home** screen
3. The widget has now been removed


You can create a Widget linked to Liberate to help you **Transfer a call, Move a call** or access **Identity**.

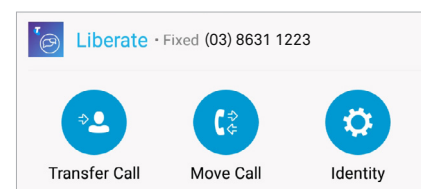



Presence

Presence is your telephony presence. It changes automatically when you are on a call notifying colleagues that you are unavailable to talk. Presence will synchronise with UC-One Connect. You do not have the ability to change your Presence within Liberate.

Presence will change to **Red** when you are on a call



Presence will change to **Green** when you are available to receive a call

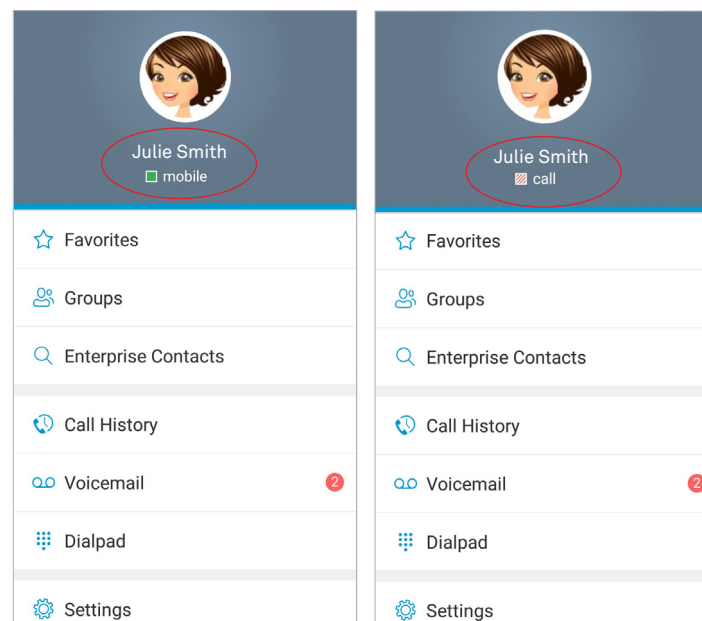


Enterprise Contacts

You have the ability to search for a contact from the **Enterprise Contacts** on your mobile device.


Search for a Contact

To search for a contact in the Enterprise Contacts:

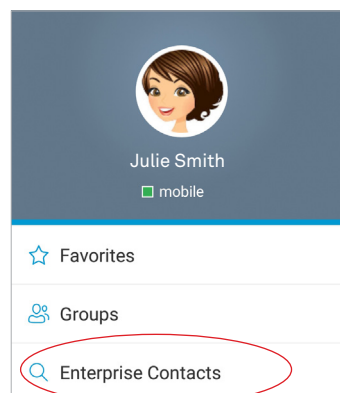

1. Tap 
2. Select **Enterprise Contacts**

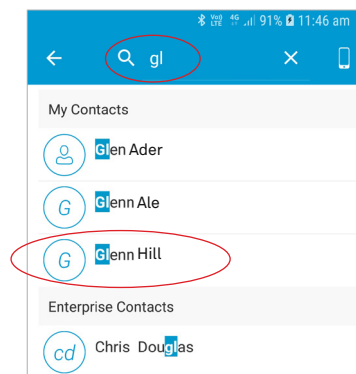


3. In the **Search** field type the name of the contact
4. Select the **Contact Name** from the search results




The contacts profile will display

5. To exit tap 
6. Then tap 

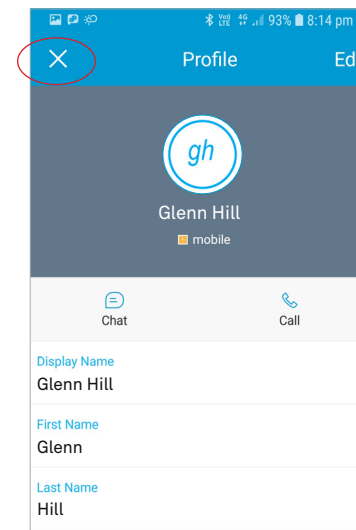


Set a Contact as a Favorite


1. Search for the contact in the **Enterprise Contacts**

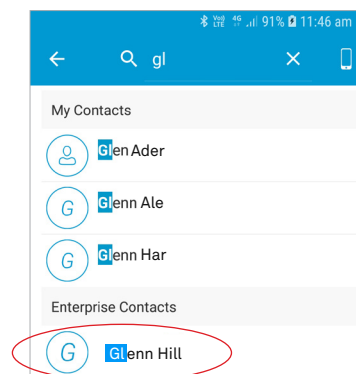


2. Select the **Contact Name**
3. Scroll downwards in the contact screen and tap **Add to Favorites**

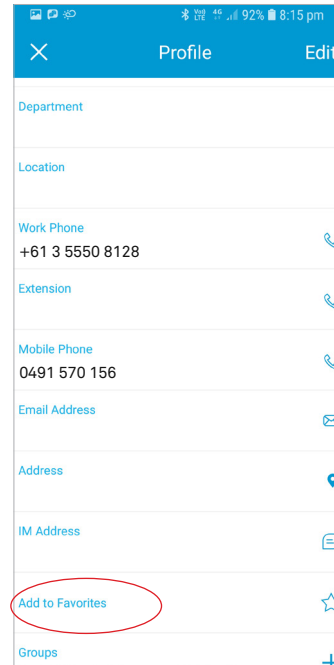


4. The contact is now displayed in your **Favorites**




5. Tap  to close the profile page

Remove a Contact from Favorites

1. Tap 
2. Select **Favorites**

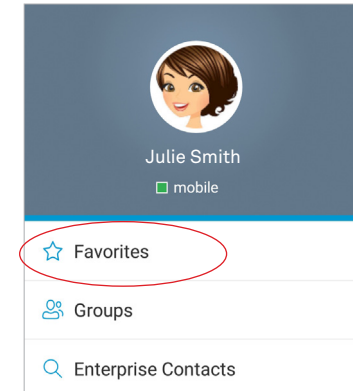


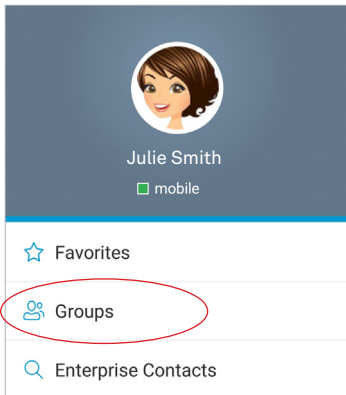

3. Tap the **contact**
4. Scroll downwards and select **Remove from Favorites**

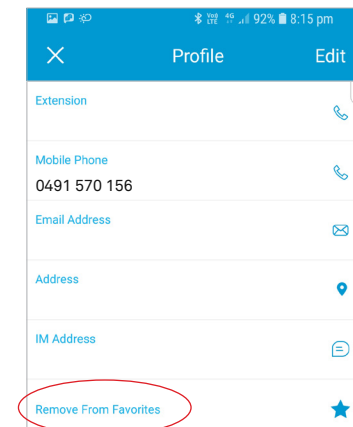


5. Tap **Close**  twice to return to the **Messages** window




Creating a Contact Group

1. Tap 
 2. Select **Groups**
- 
3. Tap 
 4. Enter the **Group Name** and tap **Create**




The group name will now appear in **Groups**

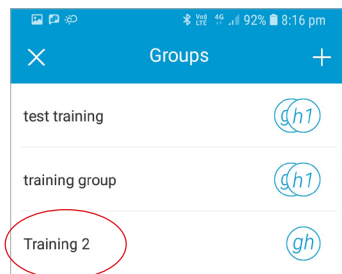

5. Tap  to close

Add a Contact to the Group


1. From the **Groups** Menu select the **Group Name**





2. Select **Add to Group** 

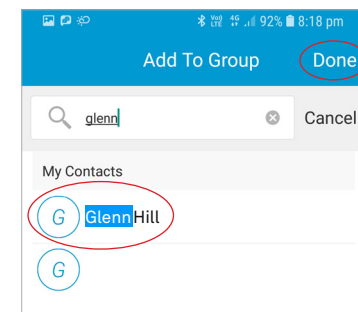

3. Search for the contact(s) you wish to add to the group





4. Select the contact(s) and tap **Done**
5. The contact will now appear in the group
6. Tap **Back** 
7. Tap **Close** 



Delete a Group

To delete a group:

1. Tap 
2. Select **Groups**
3. Tap the **Group name** and **Swipe Left**
4. Tap **Delete**




Instant Messages (Chat)


In Liberate we can **Chat** or **Broadcast**. Chat allows you to chat on a one-on-one basis or in a group. Broadcast is a one way message that you can send to one person or multiple people. You cannot broadcast to a group. If you have chatted with a colleague previously they will appear in your Messages Window. To chat with a contact:

One-to-one Chat

1. In the **Messages** Window tap on the contact you wish to chat with



2. Type your message and tap **Send**

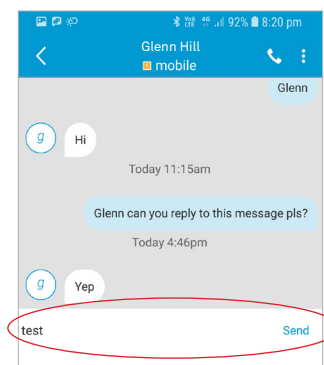


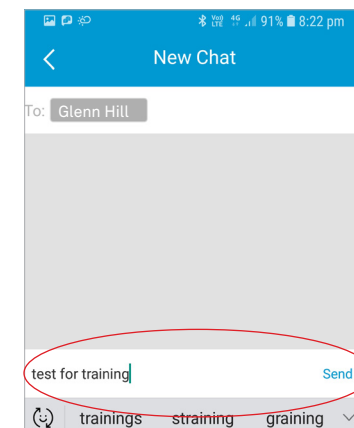
3. Tap **Back**



New Chat

To start a new chat:

1. Tap 
2. In the **To** field enter the name of the person you wish to chat with and select that contact
3. Type your message and tap **Send**




4. Tap  to close Chat




Receiving a Message

When you receive a message you have not yet read it will appear in the **Messages** Window in **red** with a number next to the name. To read the message:

1. Tap on the message.

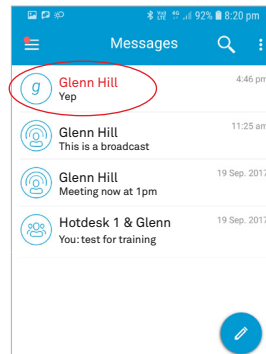

2. The message will now open to allow you to reply




3. Tap  to close Chat


Group Chat


To start a group chat:


1. Tap 
2. Select **Groups**

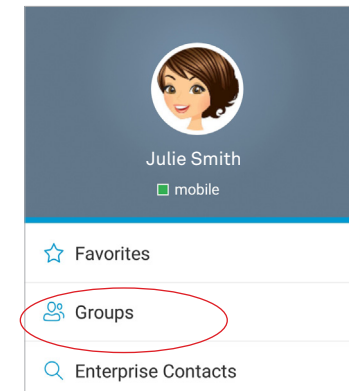


3. Select the **Group** you wish to chat with




4. Tap 




5. Select **New Chat**



6. Type your message and tap **Send**

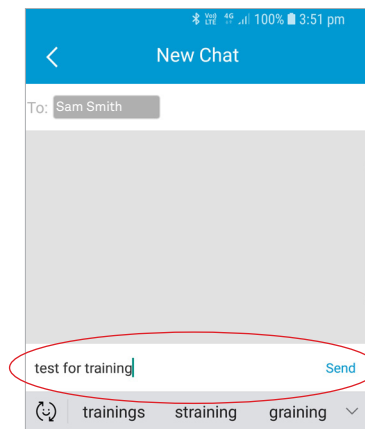

7. To close Chat, tap **Back**  twice


8. Tap 


To view the participants of a group message:

1. In the **Groups** Window tap the **Group** name



2. The participants of the group will now be visible

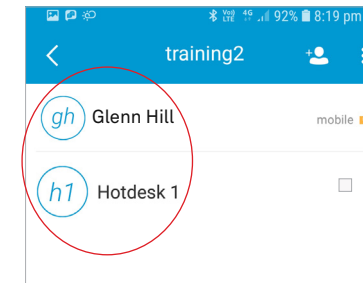


3. To close the group, tap 

4. Tap 

Marking All as Read


When you open a chat or IM it is automatically marked as read. To mark all your messages as read. From the **Message** Window:


1. Tap 
2. Select **Mark all as Read**

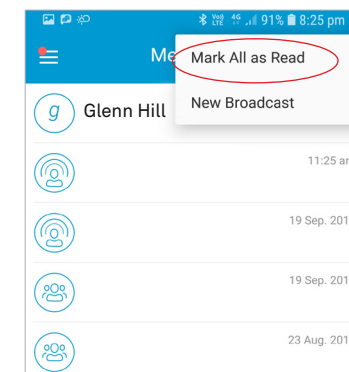


New Broadcast

New Broadcast is a one-way Broadcast. The recipient(s) cannot respond. A Broadcast can be sent to multiple contacts but not to a group. To send a new Broadcast:


1. In the **Messages** Window tap 
2. Tap **New Broadcast**

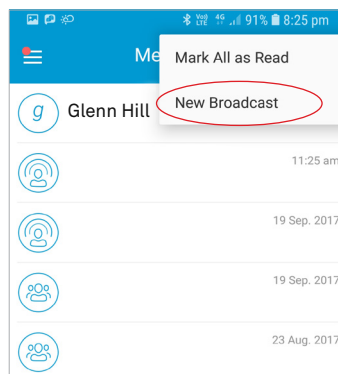

3. In the **To** field search for the people you wish to send the Broadcast to
4. Type your Broadcast and tap **Send**

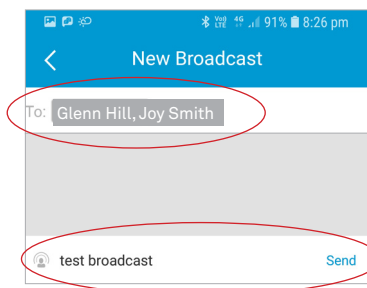

When the recipient(s) receive your message they do not have the ability to respond.




Making a Call

Users can search the **Enterprise Contacts** on their mobile phone when making calls. You can also call any number using the dial pad.


Using the Enterprise Contacts

To search for a contact in the Enterprise Contacts:



1. Tap 
2. Select **Enterprise Contacts**

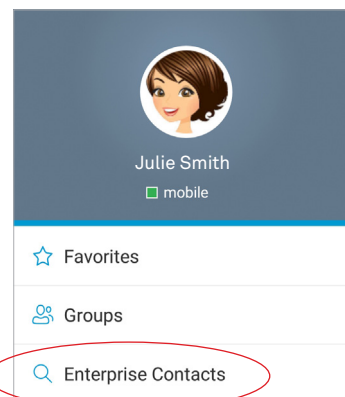

3. In the **Search** field type the name of the contact
4. Select the **Contact Name**

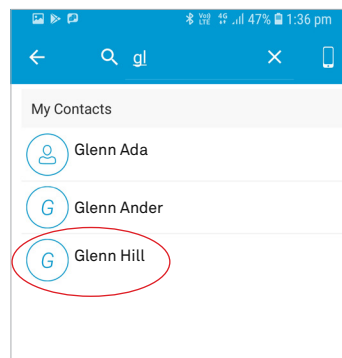

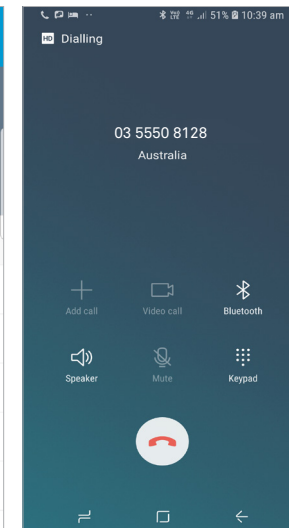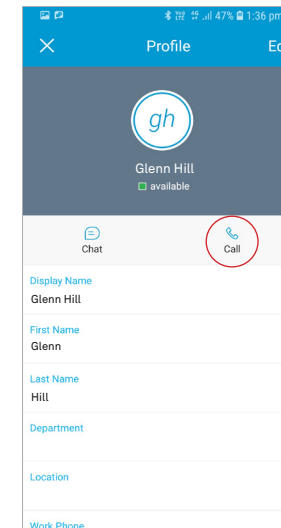


5. Tap **Call**



Using the Dialpad

Use the dialpad to make a call to someone who is not in your contacts.

1. Tap 
2. Select **Dialpad**
3. Enter the number you wish to call
4. Tap 

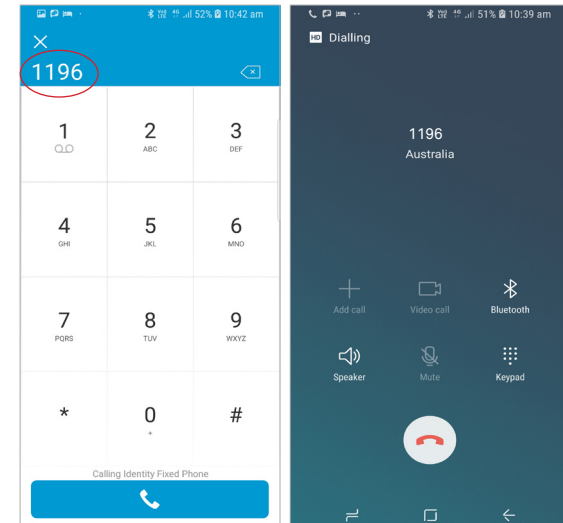


Receiving a Call

The caller's name and number will display on incoming calls if the caller is in your **Enterprise Contacts**.

You can choose to **Answer**  or


Decline  the call

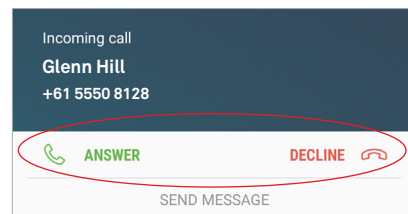


Send Message

If you are unavailable to take the call:

1. Select **SEND MESSAGE** and select from the following options

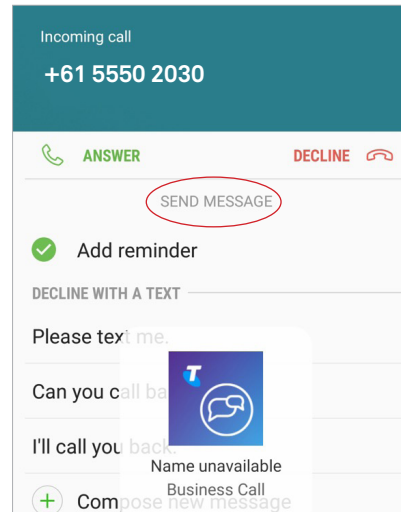


2. The caller will receive the message that you can't talk and your call will go to voicemail

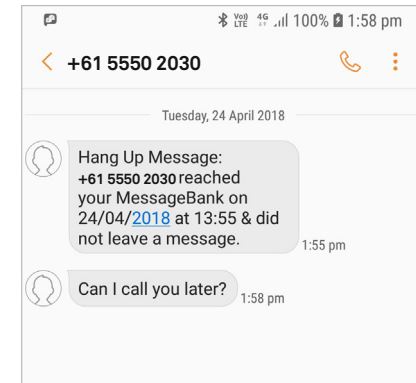

Decline a Call

To **Decline** a call when your mobile phone is ringing

1. Tap or slide Decline **DECLINE**

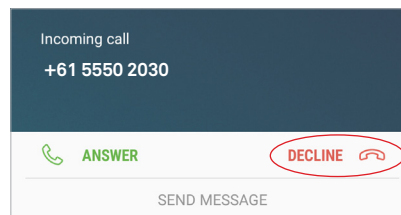


Your call will automatically go to voicemail




In Call Features


You have the ability to use the **In-Call Features** while on an active call.

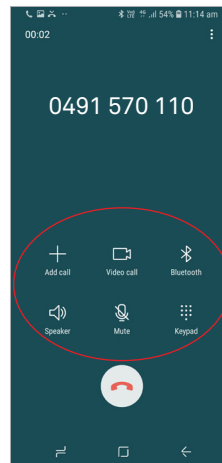



Add Call

Whilst on an active call you can add another call.


1. Tap  (active call placed on hold)
2. Enter the number you wish to call

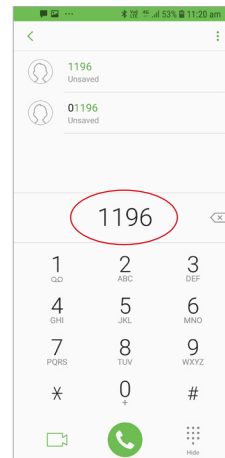

3. Tap 



4. Once the recipient answers the call tap **Merge** to merge the call into a conference call
5. Your screen will display that you are in a conference call.



Video Call

If you wish to convert the active call to a video call:

1. Tap **Video Call**



2. Tap **Video Call** again to remove



Speaker

To place your call on Speaker whilst on an active call:

1. Tap **Speaker**



To take your call off Speaker:

1. Tap **Speaker** again




Keypad

To access the Keypad whilst on an active call:

1. Tap **Keypad**



2. The keypad will open to allow you to dial the number to call

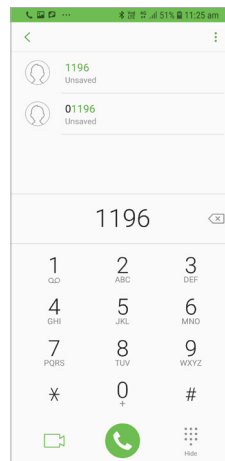

To Hide the Keypad:

1. Tap **Hide**



Mute

To place your active call on Mute:

1. Tap **Mute**



To take your call off **Mute**


1. Tap **Mute** again




Move a Call

Calls can be taken on the mobile phone and then seamlessly pushed to the desk phone or vice versa. To move a call from the **mobile phone** to the **desk phone** whilst on an active call:

1. Tap the **Home** button on your phone
2. Using the **Liberate Widget** on the **Home** screen tap **Move Call**

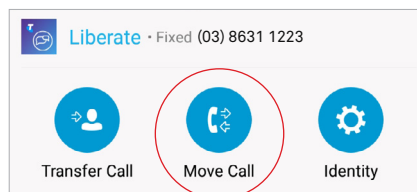

3. The following screen will appear the first time you use **Move Call**

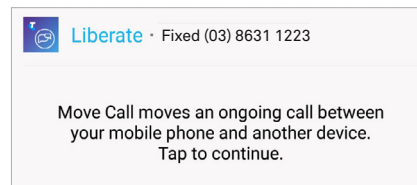

4. Your desk phone will instantly ring. When you lift the handset you now have your caller on the line and you can continue your conversation.

To move a call from the **desk phone** to the **mobile phone** whilst on an active call:


1. Press ***11** on the desk phone



Your mobile phone will ring and the call can now be taken on the mobile phone.




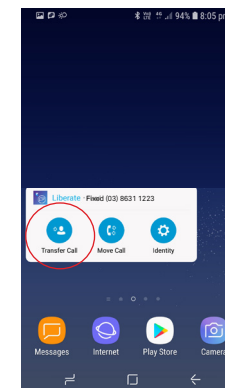
Transfer a Call

When you transfer a call, you are transferring the call to another individual or third party. That might be an internal contact or an external number. To transfer a call whilst on an active call:


1. Tap  (active call placed on hold)
2. Enter the number you wish to transfer the call to

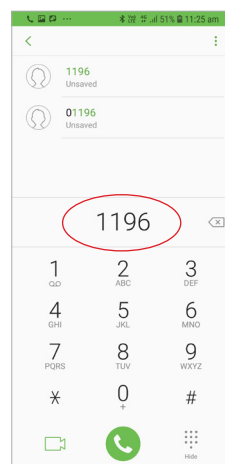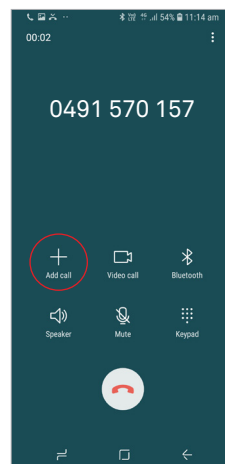


3. Tap 
4. When the caller answers announce the call and tap the **Home** button on your phone to return to the home screen



5. Using the **Liberate Widget** on the **Home** screen tap **Transfer Call**

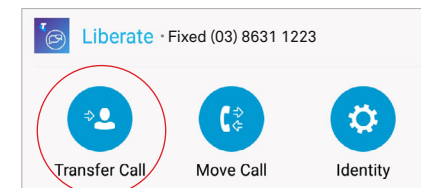

The call will automatically be transferred and you will receive the following message

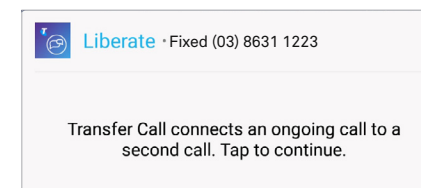


Additional Call Control

At any time whether you are in an active call or idle mode, you can swipe down from the top of your phone screen to reveal an additional **Call Control** display

While in an active call you have options to:

- **Transfer** Call
- **Move** Call
- View **Calling Identity**

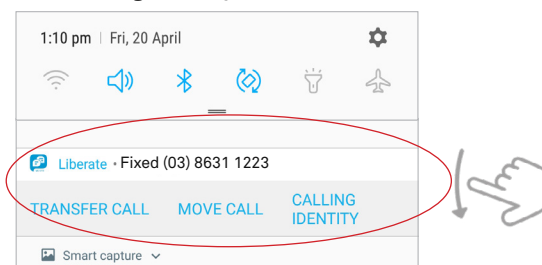

Note: This feature is a default setting. It can however be disabled in your settings:


- Go to **Settings**
- Call **Control Notification**
- Slide to **Off** position




Call History

Call History will display all calls placed, received or missed. To view Call History:

1. Tap 
2. Select **Call History**

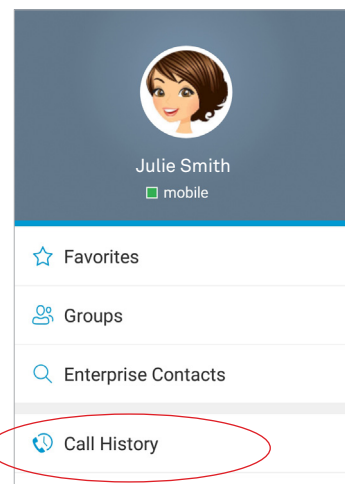

3. A list of your call history will be displayed

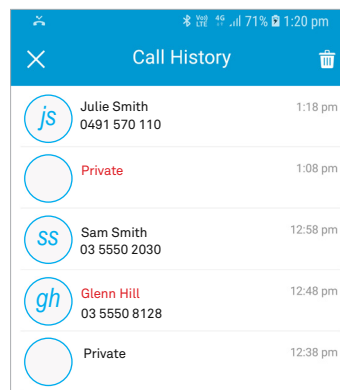


Note: Missed calls will display in Red

4. Tap the number to call or tap 


Delete Call History


To delete your call history

1. Tap 

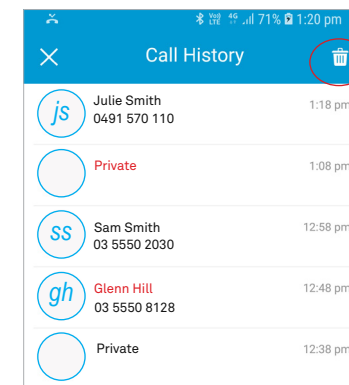

2. Tap **Delete History**




3. Tap  to close the History pane



Voicemail


Your Voicemail is now one central voicemail for all numbers. This gives you the ability to listen to your fixed number voicemail on your mobile phone. If this is the first time using Voicemail, follow the prompts to set up your PIN and greetings. To call voicemail and listen to your messages from either your desk phone or your mobile phone:

1. Tap 
2. Select **Voicemail**

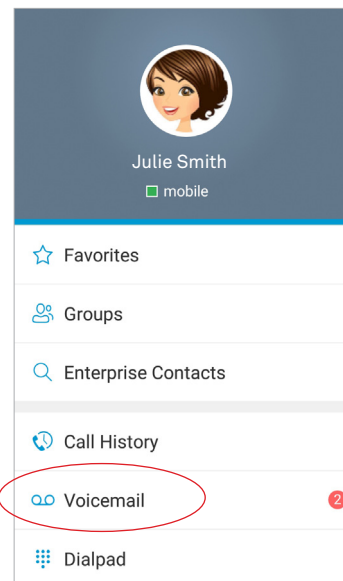


When you receive a voicemail message the number(s) of messages received will display in a red badge on the **Menu** icon and the **Voicemail** button


3. Select **Call**
Follow the prompts to retrieve your messages, set your PIN number or record your greetings.

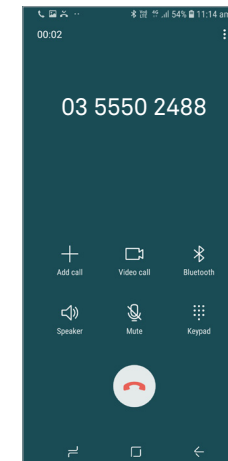

OR

1. You can use the Dialpad to access Voicemail, Dial **101** on your desk phone or mobile phone
2. Follow the prompts to record your message if you are using voicemail for the first time or follow the prompts to listen to your messages

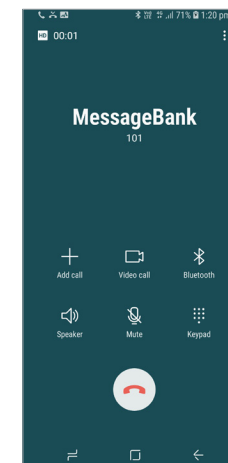




3. Tap  to end the call



Dialpad


To make a call using dialpad:

1. Tap 
2. Select **Dialpad** 
3. Enter the number
4. Tap 


Settings

Settings allow you access to your Incoming Call Settings. To manage settings:

1. Tap 
2. Select **Settings**

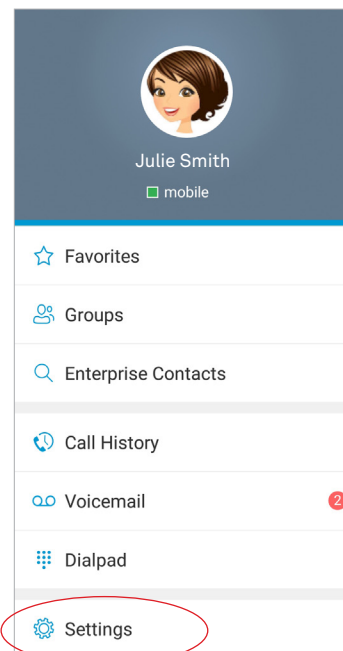


3. Tap **Call Settings**

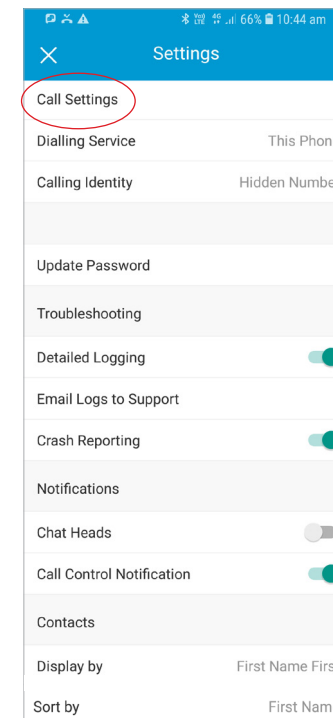

Incoming Calls


The settings for incoming calls are available for you to manage.



Note: When a call arrives on your fixed number both your mobile and desk phone will ring. When a caller dials your mobile number only your mobile phone will ring. This is one setting that cannot be managed or changed within the Liberate app.


Out of Office

Allows you to use a prerecorded real voice message so your callers know when you are on leave or just out for the day. The default will be both numbers to ring when you are Out of the Office. You have the ability to change this.

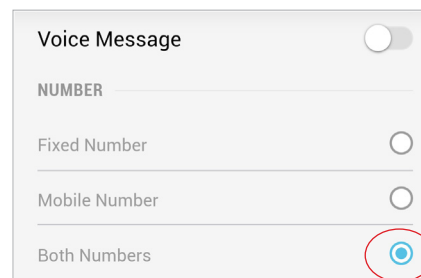


To change the Out of Office settings

1. Tap the **ON/OFF** Switch next to **Voice Message**

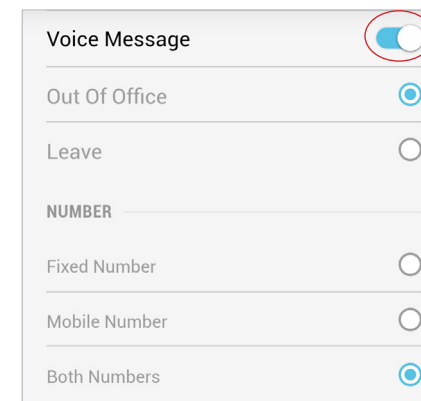

2. Select from **Out of Office** or **Leave**. This will determine the voice message your caller will receive.



if you select **Out of Office** your caller will hear the following message “The Person you are calling is out of the office until today at 5pm (your Out of Office setting, if you have attached a schedule), Press 3 or stay on the line to leave a message”.

If you Press 3 or stay on the line you will hear “You have reached the Messagebank of 03xxxx xxxx”.

If you select **Leave** your caller will hear the following message “The person you are calling is on Leave until today at 5pm (your Out of Office setting, if you have attached a schedule). Press 3 or stay on the line to leave a voice message”.


If you Press 3 or stay on the line you will hear “You have reached the Messagebank of 03xxxx xxxx”.



Selecting the Number to apply to Out of Office

You can choose which number to use with Out of Office. If you only want Out of Office to activate when your **Fixed Number** is called:


1. Tap the **Radio Button** next to **Fixed Number**



This means Out of Office applies when your **desk phone** is called.


If you want Out of Office to activate when your **Mobile** is called:

1. Tap the **Radio Button** next to **Mobile Number**



To use Out of Office with both your **Fixed Line** and **Mobile Phone**:

1. Tap the **Radio Button** for **Both Numbers**




Out of Office is now activated for both **Fixed** and **Mobile** numbers.

Schedule


You have the ability to stipulate a timeframe for Out of Office. You do this by using Schedule.

To attach a **Schedule** to Out Of Office:


1. Tap the **ON/OFF** switch next to **Schedule**



2. In the **End** field tap the **Date and Time**
3. Scroll through the dates and select the date that you want **Out of Office** to Switch **OFF**

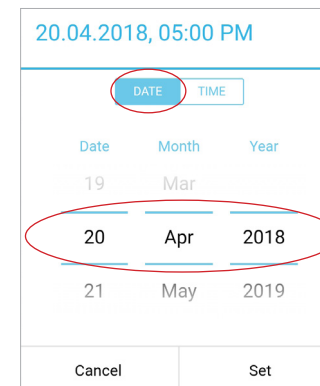

4. Tap **Time** and select the time you want Out of Office switched **OFF**

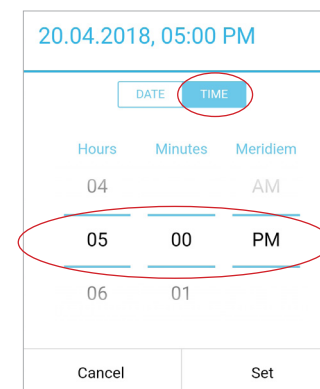

5. Tap **Set**


In this example Out of Office will **deactivate** on 20th April 2018, at 5pm




Transfer Call

If you wish to transfer your calls to a third party or a different number whilst you are Out of the Office.

1. Tap the **ON/OFF** switch next to **Transfer**

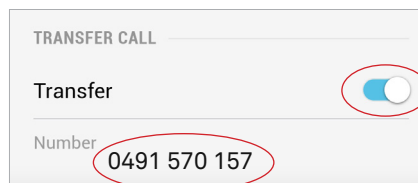

2. Enter the third party number that you want your calls transferred to
3. Tap **Done** or **Go**

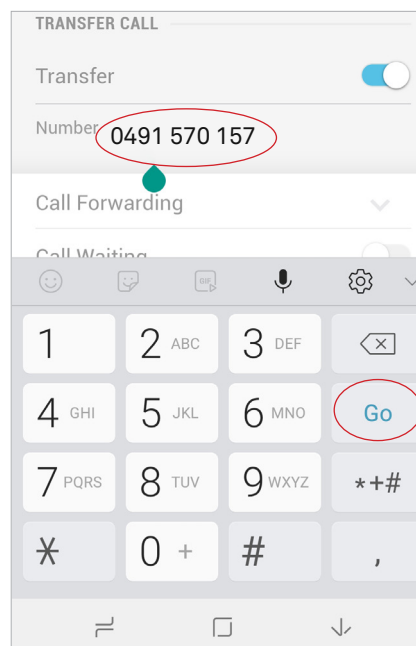

Your caller will automatically go to voicemail and receive the following message:


“The person you are calling is Out of the Office until today at 5pm (this will stipulate the Out of Office settings, if

you have attached a schedule). To be transferred to an Attendant (which is the third party number you entered) **Press 2** otherwise **Press 3** or stay on the line to leave a voice message”.

When you stay on the line you hear – “you have reached the messagebank of 03 xxxx xxxx.

When you Press 3 you hear “you have reached the messagebank of 03 xxxx xxxx”.


Note: the Attendant is the third party number you entered in Step 2.

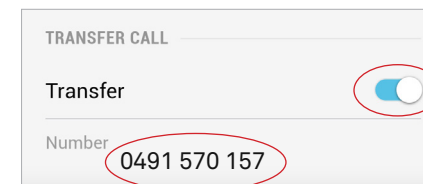

Switch Transfer Off

To Switch Transfer off:


1. Tap the **ON/OFF** Switch next to **Transfer**



Switch Out of Office Off

To switch Out of Office Off:

1. Tap the **ON/OFF** Switch next to **Voice Message** Call Forwarding

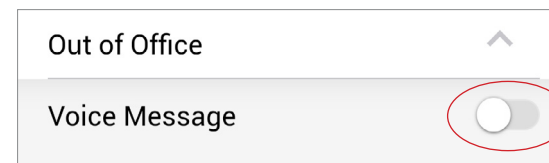


Call Forwarding

Call Forwarding allows you to forward your calls to an alternative number **NOT** to your fixed number or mobile phone number. All calls will be forwarded to the configured phone number after a certain number of rings, when your desk phone or mobile phone is not answered. You can choose to forward calls from your desk phone or mobile phone or both. To activate Call forwarding:

1. Tap 
2. Select **Settings**
3. Select **Call Settings**
4. Tap the **dropdown** for **Call Forwarding**



The following options are available:

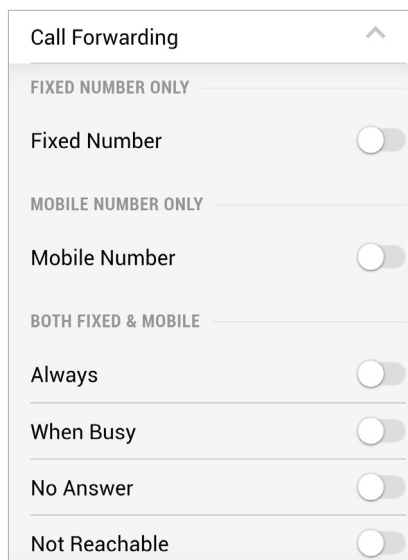


Call Forward Fixed Number

To call forward calls received on your desk phone:

1. Tap the **ON/OFF** switch next to **Fixed Number**
2. Enter the telephone number in the **Number** field

3. Select **All Day, Every Day** or **Schedule**

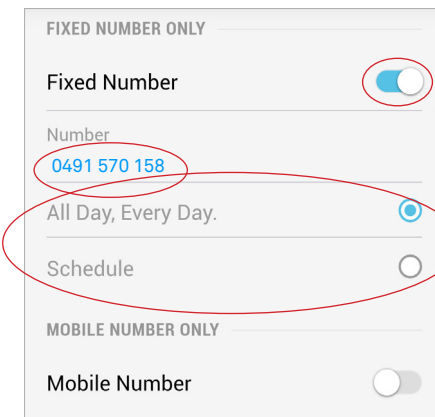

Note: Standard Pack customers do not have this feature

All Day, Every Day will continue to forward your desk phone calls every day until you switch it off.

Schedule – Desk Phone

Attaching a Schedule to your desk phone call forwarding gives you more flexibility as you can stipulate the dates and times for your call forwarding. To set up a schedule:

1. Tap **Schedule**



2. In the **From** field select the time you want Call Forwarding to **start**
3. In the **Time** field select the time you want Call Forwarding to **finish**
4. In the **Recurrence** field deselect the days you **don't** want the Schedule to apply. Week days are selected by default. Deselect the days you **DO NOT** want the schedule to apply.



In this example **Call Forwarding** will commence at 9am on Tuesday and finish at 5pm on Wednesday.

Call Forward Mobile Number

To call forward calls received on your mobile phone:

1. Tap the **ON/OFF** switch next to **Mobile Number**
2. Enter the telephone number in the **Number** field
3. Select **All Day, Every Day** or **Schedule**

Note: Standard Pack customers do not have this feature

Schedule – Mobile Number

Attaching a Schedule to your **mobile phone** call forwarding gives you more flexibility as you can stipulate the dates and times for your call forwarding. To set up a schedule:

1. Tap **Schedule**

2. In the **From** field select the time you want Call Forwarding to **start**
3. In the **Time** field select the time you want Call Forwarding to **finish**
4. In the **Recurrence** field **deselect** the days you **don't** want the Schedule to apply. Week days are selected by default. Deselect the days you **DO NOT** want the schedule to apply.

In this example **Call Forwarding** will commence at 9am on Tuesday and finish at 5pm on Wednesday.



Both Fixed and Mobile Numbers

To Call Forward calls received on both your desk phone and mobile phone to a third party choose from the call forwarding options available to you in Liberate:

- **Always**
- **When Busy**
- **No Answer**
- **Not Reachable**

BOTH FIXED & MOBILE

Always ☒

When Busy ☐

No Answer ☐

Not Reachable ☐

Always

To call forward calls that are received on your **desk phone** and your **mobile phone** always:

1. Tap the **ON/OFF** switch next to **Always**
2. Enter the telephone number of the third party in the **Number** field

BOTH FIXED & MOBILE

Always ☒

Number
0491 570 157

When Busy

To call forward all calls received on your **desk phone** and **mobile phone** to a third party when your phones are busy:

1. Tap the **ON/OFF** switch next to **When Busy**

2. Enter the telephone number of the third party in the **Number** field

When Busy ☒

Number
03 5550 2488

No Answer

To call forward all calls received on your **desk phone** and **mobile phone** to a third party when there is No Answer:

1. Tap the **ON/OFF** switch next to **No Answer**
2. Enter the telephone number of the third party in the **Number** field
3. Tap the **No. of Rings** field and select the number of rings

No Answer ☒

Number
03 5550 2488

No. of Rings
3

4. Tap **Set**

Select

2

3


4

Cancel Set

Not Reachable

Calls will be forwarded when your desk phone and mobile phone is not accessible or inactive due to power loss to the site or no network connectivity. To activate:

1. Tap the **ON/OFF** switch next to **Not Reachable**
2. Enter the telephone number of the third party in the **Number** field

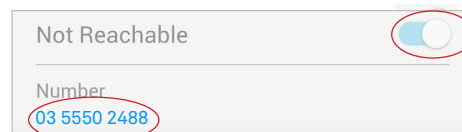


Turning Call Forwarding Off

To switch Call Forwarding Off

1. Tap 
2. Select **Settings**
3. Tap **Call Settings**
4. Tap the **Call Forwarding** dropdown




5. Ensure all the **ON/OFF** switches are switched **OFF**

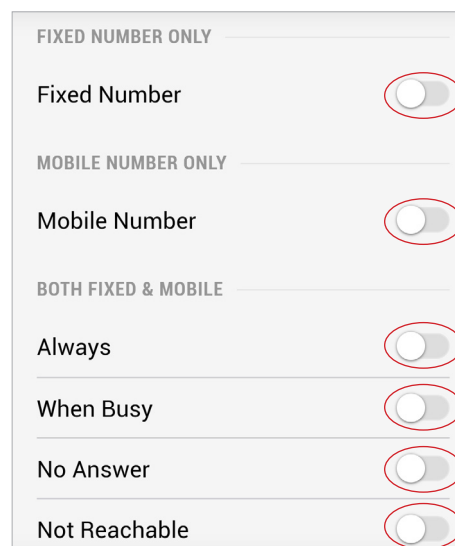

Call Waiting

If your standard SIPC profile has Call Waiting switched on by default then this setting will show in Liberate. If turned **On**, when a second call arrives the first call will immediately be placed on hold and the second call will be answered. The user is not given an option to “hold the first call and answer the second incoming call, or end the first call to answer the second incoming call”.

To Switch Call Waiting OFF:


1. Tap 
2. Select **Settings**
3. Tap **Call Settings**
4. Tap the **Call Waiting ON/OFF** Switch




Call Centre Queues


If you are a member of a Call Centre, Call Centre Queues will be visible and allow you to log into and out of your Call Centre. This gives you the ability to manage your Call Centre queues on your mobile phone.

Log into the Call Centre

1. Tap 
2. Select **Settings**
3. Tap **Call Settings**
4. Tap the dropdown for **Call Centre Queues**

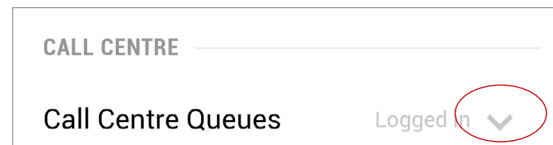

5. Tap the **ON/OFF** Switch for your Call Centre to switch **ON**

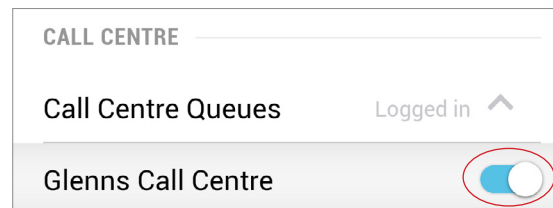

You are now logged into your call centre and will have the ability to receive calls.

Log out of the Call Centre

1. Tap the **ON/OFF** Switch for your Call Centre to switch **OFF**





Note: The Voicemail of the Call Centre number must be activated to allow callers to leave a message when the Agent is logged out of the Call Centre.



Liberate and Cloud Communications Recording (CCR) - Call Settings

If you are a Liberate user with Cloud Communications Recording (CCR) and have Recording Always activated in your profile, Your Call Settings will be restricted to **Call Waiting only**. You can switch **ON/OFF** by tapping on the **ON/OFF** switch.

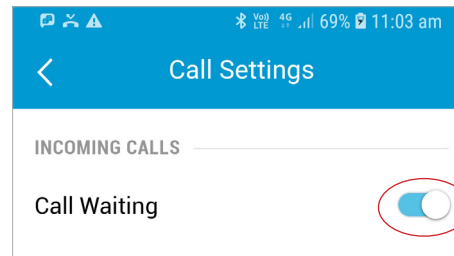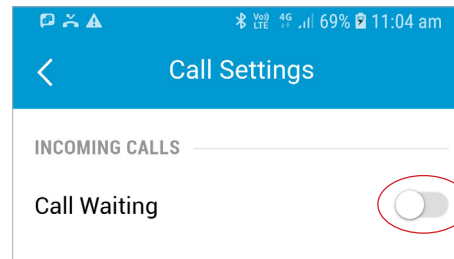

Dialling Services


Stipulates the number of the mobile phone.




Calling Identity

Changing the **Identity** features allows you to select a number for outgoing calls, either fixed or mobile. Your fixed number is your desk phone and will be the default setting for outgoing calls. The number selected will be displayed as your outgoing call number when you make a call from your mobile device. Which means you now have the ability to use your mobile to call from your fixed number.

To change the Identity settings:

1. Tap 
2. Select **Settings**
3. Tap **Calling Identity**
4. By default your **Fixed Phone** (business number) will be selected. This is the number that will be displayed when you make an outgoing call.

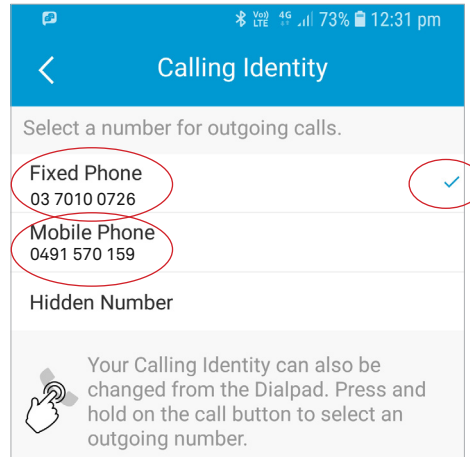

To display your mobile number as your outgoing number

1. Tap **Mobile Phone**



Hidden Number means that your number will **not** be displayed to your caller. To hide your number for outgoing calls:

1. Tap **Hidden Number**



2. Tap  to return to **Settings**


3. Tap 




Using the Liberate Widget to Change Identity



It is possible to use the Liberate Widget to change your Identity:

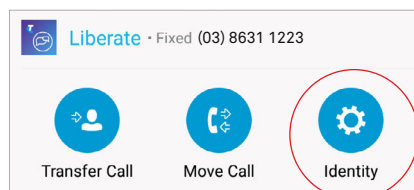1. Tap the **Home** button to return to the **Home** screen
2. From the Widget tap **Identity**

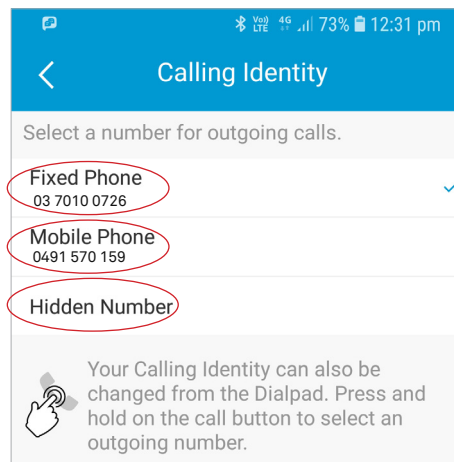

3. Select from **Fixed Phone**, **Mobile Phone** or **Hidden Number**




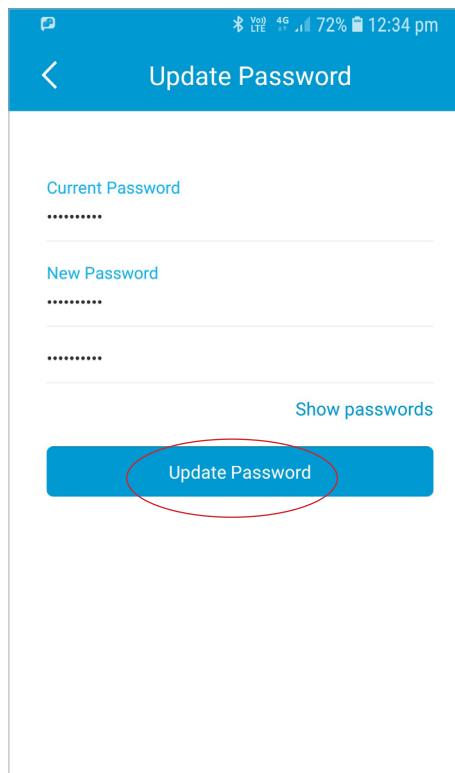
4. Tap 
5. Tap 



Update Password

Update Password allows you to update your Liberate password. To change your password:

1. Tap 
2. Select **Settings**
3. Tap **Update Password**
4. Enter your **Current Password**
5. Enter your **New Password**
6. Enter your **New Password** again to verify
7. Tap **Update Password**




Troubleshooting

Troubleshooting offers features that can help you report issues and system crashes.



Detailed Logging

Detailed Logging is switched on by default. It allows detailed logs to be sent to Support when an error or problem occurs.

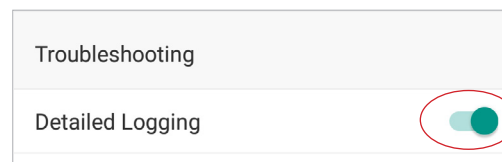

Email Logs to Support

You have the ability to email the detailed logs to Support via **Email** or **Gmail**. When you select an option an email will be created to allow you to send the logs to Support. We recommend that this is switched **OFF** and only needs to be switched **ON** when you are experiencing issues and are requested to do so by Telstra Support. Telstra Support will advise which email address to use in the **To** field of the email.

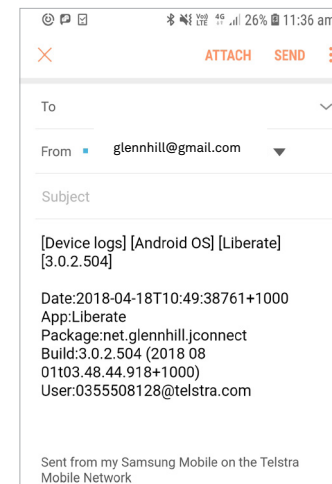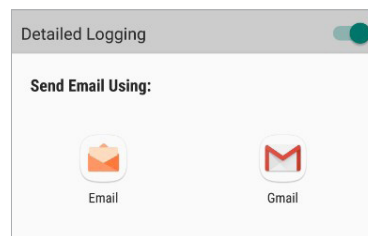

Crash Reporting

Crash Reporting is switched **On** by default. It will send notification and logs when Liberate crashes.

Crash Reporting



Notifications

Chat Heads

Each time you receive a new message in Liberate, a small notification with the contact's picture — called a Chat Head — is displayed on your screen.

Chat Heads are switched **OFF** by default. You can switch on by tapping the **ON/OFF** switch.

Chat Heads



Chat Heads



Call Control Notification


Call Control Notifications are switched on by default. This allows the Liberate widget to appear in Notifications when switched On.


Call Control Notification




Contacts

It is possible to determine how your contacts will be displayed. To select:

1. Tap 
2. Select **Settings**
3. Tap **Display by**
4. Select **First Name First** or **Last Name First**

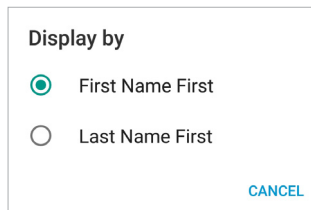

5. Tap **Sort by**
6. Select **First Name** or **Last Name**

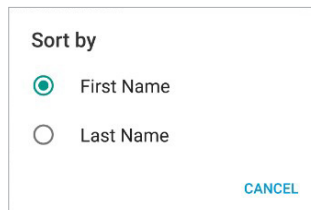


7. Tap  to close



About

About provides you with information about Liberate. This is where you can determine the version you are using, information on the Licence, Legal Notices and access the Welcome Screens.

1. Tap 
2. Select **About**

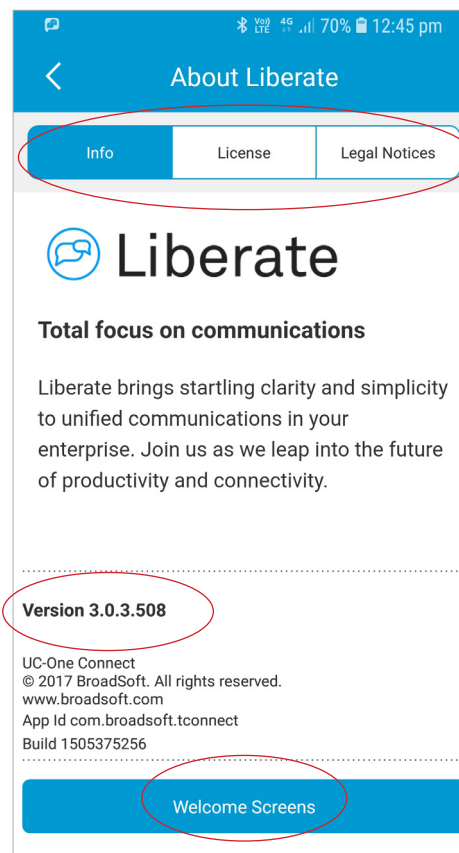


3. Tap the relevant tab to access – **Info**, **License**, **Legal Notices** or **Welcome Screens**.



Signing Out

When you no longer want colleagues to see your telephony presence or receive calls you can sign out of Liberate. To sign out:

1. Tap 
2. Select **Sign Out**

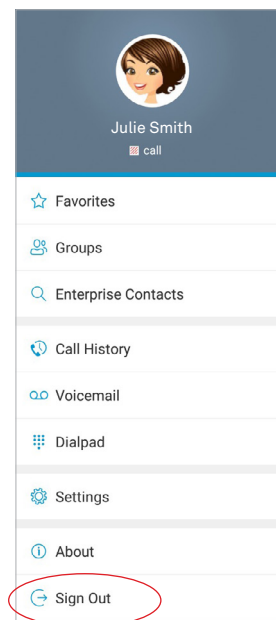

3. You will be prompted "Are you sure you want to sign out?"
4. Select **Sign Out**

Help/Support

For help/support view the Liberate (TIPT) documentation available on the Telstra Resource Centre.

[Liberate \(TIPT\) Documentation](#)

Or

Call Liberate Support (TIPT) **1800 287 289**

