

Telstra S60

Telephone User Guide



TechHelp
1300 369 193

If you have any problems with your phone, refer to the Help section of this User Guide or call TechHelp on 1300 369 193.

Telstra

In this guide

Key features	3
Telstra S60 parts checklist	4
Setting up your Telstra S60	5
Safety instructions	6
Wall mounting your Telstra S60	7
Getting to know your Telstra S60	8
Using your Telstra S60	9
Adjusting the ringer volume	9
Answering a call	10
Making a call	10
Mute	10
Storing numbers for one-touch memory	10
One-touch memory dialling	11
Storing numbers for two-touch memory dialling	12
Two-touch memory dialling	12
Help	13
Customer service & Product warranty	14
Wall mounting template	15

© COPYRIGHT 2006 Telstra Corporation Limited

This work is copyright. All rights reserved. Other than for purposes and subject to conditions prescribed under the Copyright Act, no part of it may in any form or by any means (electronic, mechanical, photo copying, microcopying, scanning, recording or otherwise) be reproduced, stored in a retrieval system or transmitted without prior permission from Telstra Corporation Limited ABN 33 051 775 556.

™ Trade Mark of Telstra Corporation Limited

® Registered Trade Mark of Telstra Corporation Limited

Key features

M1



One-touch memory button

The one-touch memory button allows you to call your most frequently used number by pressing a single key.

Memory



10 two-touch memory buttons

You can program 10 of your most commonly used telephone numbers into the telephone. This allows you to dial any of these numbers simply by pressing two buttons.

Redial/
Pause



Last number redial

Lets you redial the last number you dialled with the one key press.

+Vol -Vol



Volume buttons

Lets you increase or decrease the earpiece volume while on a call.

Telstra S60 parts checklist


Your Telstra S60 has been designed for ease of use and made to the high standards set by Telstra. Please read the instructions carefully and keep this User Guide for future reference. If anything is missing, please contact TechHelp on 1300 369 193 immediately.

Telephone Base Unit


Telephone Handset

Handset Cord

(Shown here assembled)

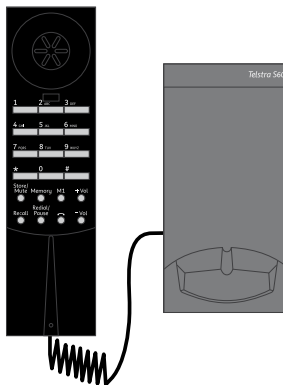

Wall Mount Bracket & Screws



Telephone Line Cord & Adaptor Plug



Setting up your Telstra S60

Before plugging your Telstra S60 into the telephone line you need to assemble the unit.


Step 1

Wrap the telephone line cord into the cable storage of the telephone base.

Step 2

Plug the line cord into the telephone wall socket

**Your S60 is
now ready
to use.**

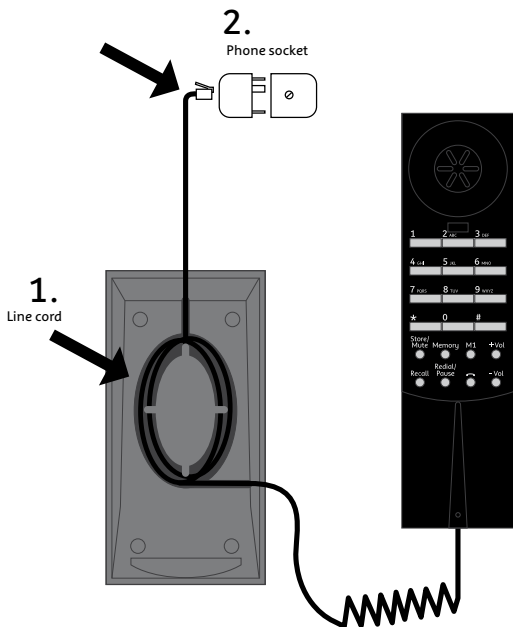

Safety instructions

Read and follow all instructions and warnings.



- Do not use this product during an electrical storm, as it is possible to get a shock.
- Do not use the product near water, or when wet.
- Keep the product away from heaters and direct sunlight.
- Slots and openings in the cabinet are provide for ventilation. Ensure these are not blocked or covered.
- Do not open the unit. There are no user serviceable parts inside. Warranty conditions will not apply if the unit has been opened.
- Unplug the unit before cleaning. Do not use detergents or sprays. To clean the outside plastic parts use only a damp cloth.
- Do not push objects into ventilation openings. This could cause an electrical shock.
- Do not use this telephone near flammable gases or liquids.

Wall mounting your Telstra S60

Your Telstra S60 can be wall-mounted by using the wall mounting bracket supplied.

Using the wall mounting template (on page 15), drill 2 holes for the screws and insert the wall plugs (if required).

Follow the illustrations below to complete wall mounting your S60.

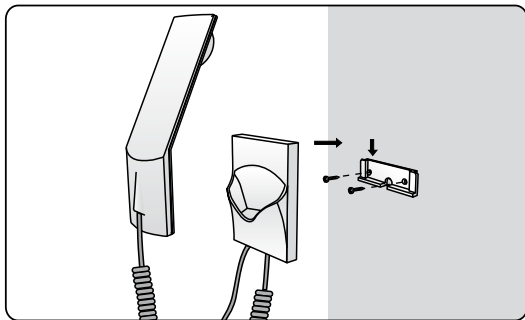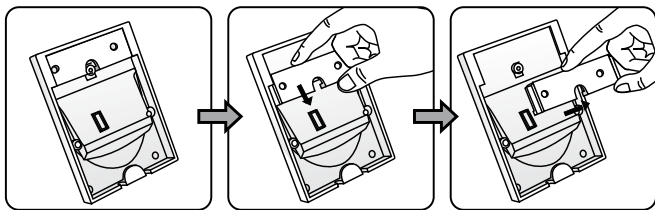

Getting to know your Telstra S60

Keypad

Memory

Use to store numbers in the Two-Touch memory

Store/Mute

Press to mute the microphone during a call. Also used when storing numbers in memory.

Recall

Used when connected to certain PABX's and with some Telstra features such as Call Waiting



M1

Press for One-Touch memory dialling

+ Vol & - Vol

Press to increase or decrease volume while on a call

Hang Up

Press to end a call and return to dial tone. Replace handset in base to hang up.



Redial/Pause

Press to redial the last number dialled.

Using your Telstra S60

Adjusting the ringer volume

Your phone is built with 3 preset ringer melodies and loudness levels. To change the melodies and loudness level, follow the instructions listed below:-

1. Pick up the handset.
2. Press and release  button.
3. Press and release the  button.
4. Use the numbered button (*keypad*) to make your selection of ringer melodies and loudness level combination.

Numbered button	Ringer melody	Loudness level
1	A	Low
2	A	Normal
3	A	High
4	B	Low
5	B	Normal
6	B	High
7	C	Low
8	C	Normal
9	C	High
0	Off	Off

5. Hang up to store the new setting.


Answering a call

Lift the handset to answer the call.



Making a call

1. Lift the handset.
2. Listen for a dial tone then enter the number you wish to call.

Ending a call




Replace the handset in the base to hang up. To end a call and return to dial tone press 


Mute

To prevent the other party from hearing you while on a call press the  button. To resume speaking press the  button again.


Storing numbers for one-touch memory

One-touch memory provides you with the easiest way to make a call to a frequently used number. Follow the instructions listed below to store a number (21 digits maximum) into the one-touch memory bank:

1. Lift the handset.
2. Press the  button.
3. Press the  button, followed by the desired phone number that you wish to store.
4. Press the  button or replace handset in base.

If your phone is connected to a PABX, you may need to insert a PAUSE after the PABX access code. To do this, press the  button.





One-touch memory dialling


To make a call with one-touch memory, simply pick up the handset and wait for a dial tone, press the  button. The stored phone number will be dialled.

Besides the one-touch memory, this phone is also equipped with 10 two-touch memory banks.


Follow the instructions listed below to store a number (21 digits maximum) into the two-touch memory dialling.

Storing numbers for two-touch memory dialling

1. Lift the handset.
2. Press the  button.
3. Press the  button followed by the desired memory button, 0 to 9.
4. Enter the number to be stored.
5. Press the  button again.
6. Press the  button or replace handset in base.

If your phone is connected to a PABX, you may need to insert a PAUSE after the PABX access code. To do this, press the  button.

Two-touch memory dialling

To make a call with two-touch memory dialling, simply pick up the handset and wait for dialling tone, press the  button followed by the corresponding numbered button. The stored phone number sequence will be dialled.

Help


No dial tone

Check that the telephone line cord is firmly connected to the wall socket. Push it in firmly until it clicks.

Telephone does not ring

Check that the programmed ring setting is not set to OFF. Refer to page 9. You may have too many devices on your telephone line. Note the REN number that is written on the base of all your devices, the total should not be more than three.

If the other person cannot hear you

Check that the  button was not pressed by mistake.

Maintenance

There is no regular maintenance required for your Telstra S60 telephone.

To clean the outside plastic, first unplug the unit and use only a damp cloth. Do not use detergents or sprays.

Wall mounting template

Refer to page 7 on 'Wall mounting your Telstra S60' for how to use this template which is located on page 15.

Customer service & Product warranty

IMPORTANT

Please retain this booklet with your sales receipt as proof of the date of purchase

Customer Service

If you require assistance in operating this product please call the TechHelp Information Line on 1300 369 193 or contact us by e-mail at: tcpsupport@ingrammicro.com.au

If you are trying to access a Telstra Network Service and require assistance specifically related to the network service, or would like to subscribe to the service, contact Telstra on 132200 for residential or 132000 for business.

Product Warranty

Subject to the conditions below, Telstra guarantees this product against any defect in materials or workmanship under conditions of normal use for a period of 13 months from date of purchase.

The benefits conferred by this warranty are in addition to other warranties and remedies that are implied under the Trade Practices Act and similar State and Territory laws (Statutory Rights).

Subject to your Statutory Rights, the goods will not be eligible for service under this warranty if:

- a) Proof of purchase cannot be provided;
- b) The defect was caused by an accident, misuse, abuse, improper installation or operation, vermin infestation, lack of reasonable care, unauthorised modification, loss of parts, tampering

or attempted repair by a person not authorised by Telstra; or

- c) The product has been damaged by lightning or a mains power surge.

To obtain service during the terms of this warranty call the TechHelp Information Line on 1300 369 193 or contact us by e-mail at: tcpsupport@ingrammicro.com.au

If it is necessary to have the product serviced, the Customer Service Representative will inform you of the product return process.

Please ensure that:

- a) You provide proof of purchase;
- b) Your product is suitably packaged; and
- c) You have included all components from the original purchase.

Subject to your Statutory Rights:

- a) Any claim under this warranty is limited to the cost of repair or replacement of the product; and
- b) If the goods are found to be in sound working order by the authorised service centre, you may be charged a fee for service and for any other direct costs associated with having the product delivered for service.

S60 wall mounting template

Use this template as a guide to drill holes for wall mounting your S60. Refer to page 7 for details.





www.telstra.com

Telstra